


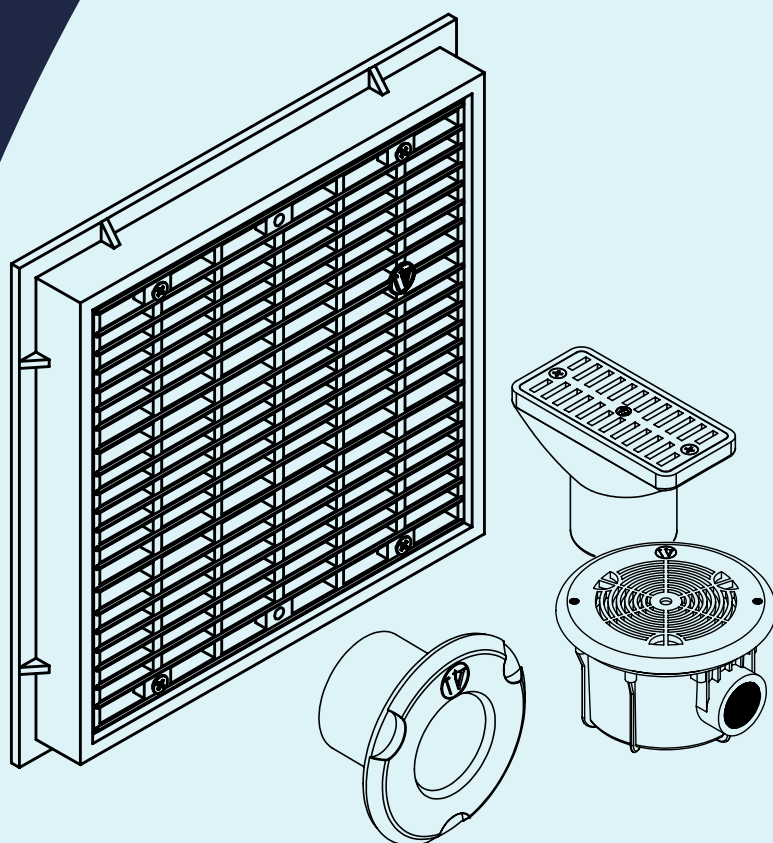


CONCRETE POOL FITTINGS CATALOGUE

CONCRETE POOL FITTINGS

STANDARD WALL INLET

PRODUCT FEATURES


- Made of plastic resistant to pool chemicals and UV rays with directional flow ball
- Outside diameter 2" (thread)
- Max flow rate 7 m³/h
- Inside diameter 50 mm (glue)
- Custom colors available upon request

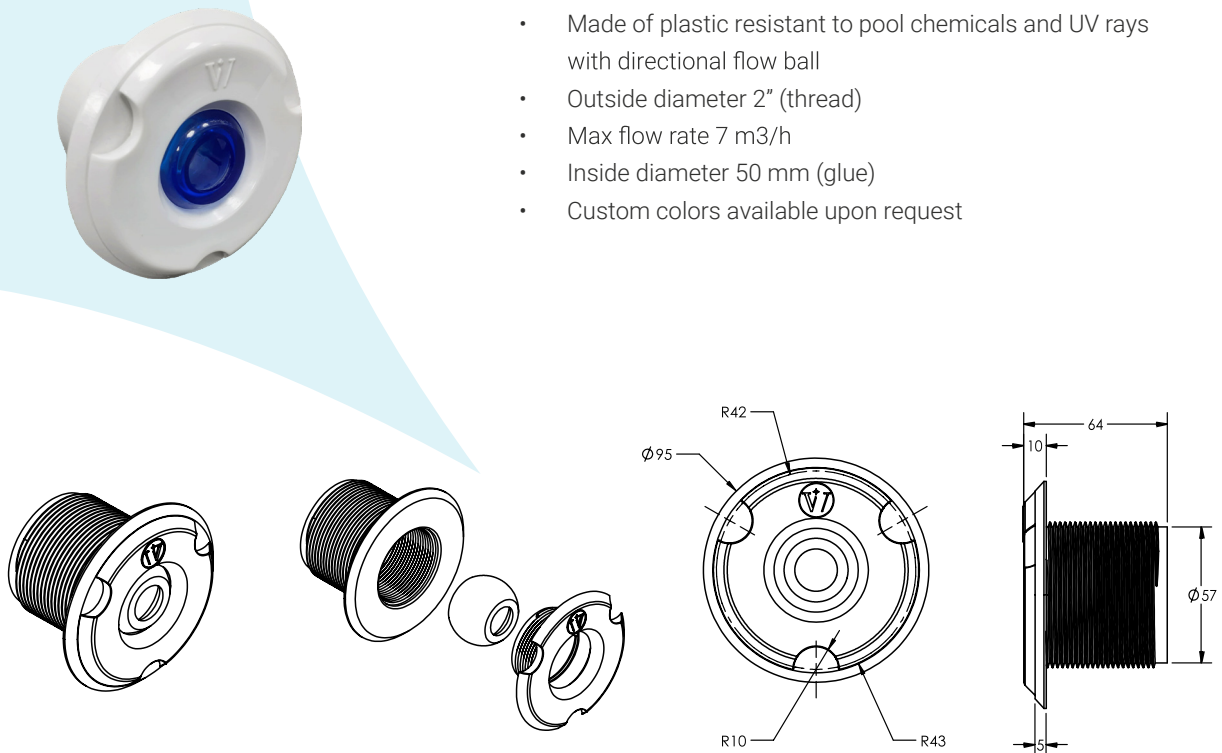

HYDRO STORM WALL INLET

PRODUCT FEATURES

- Made of plastic resistant to pool chemicals and UV rays with directional flow ball
- Outside diameter 50 mm (glue)
- Connection inside fitting is 50 mm or 2 inch pipe
- Max flow rate 5 m³/h
- Custom colors available upon request

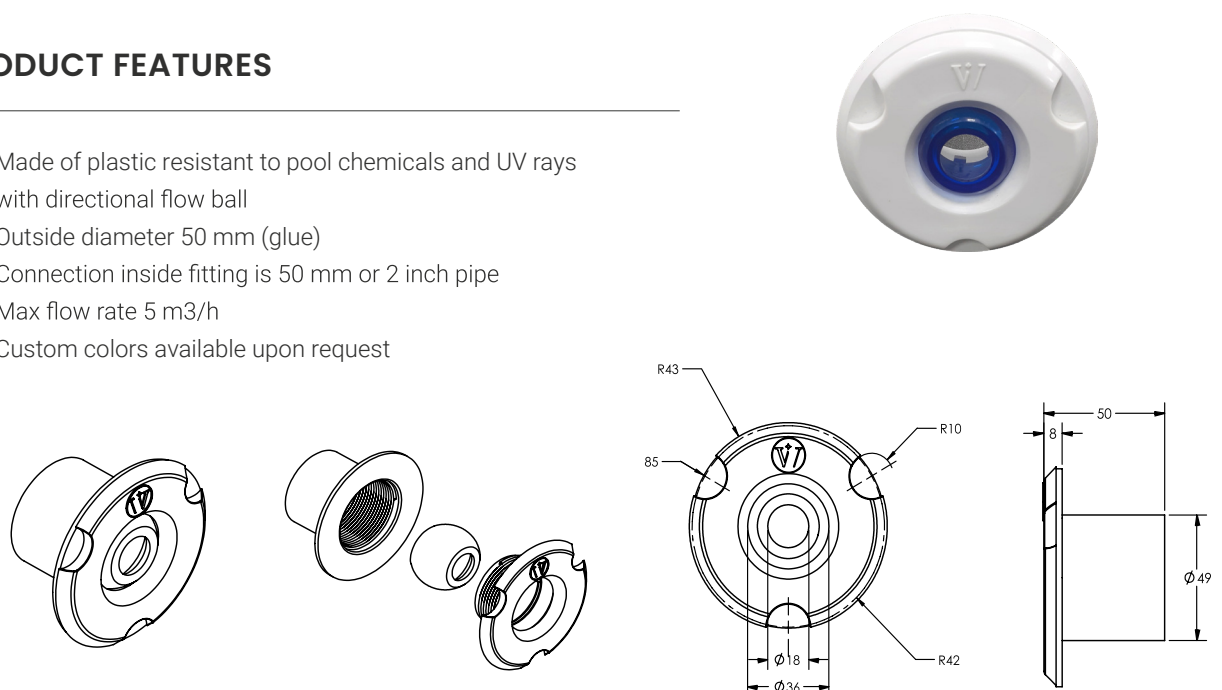


FLOOR INLET



PRODUCT FEATURES


- Adjustable different flows
- Supplied with stainless steel screws
- 2 inches external thread
- 1 ½" inside the diameter (glue)
- Available with 50 mm inside diameter
- Max flow rate 8 m³/h

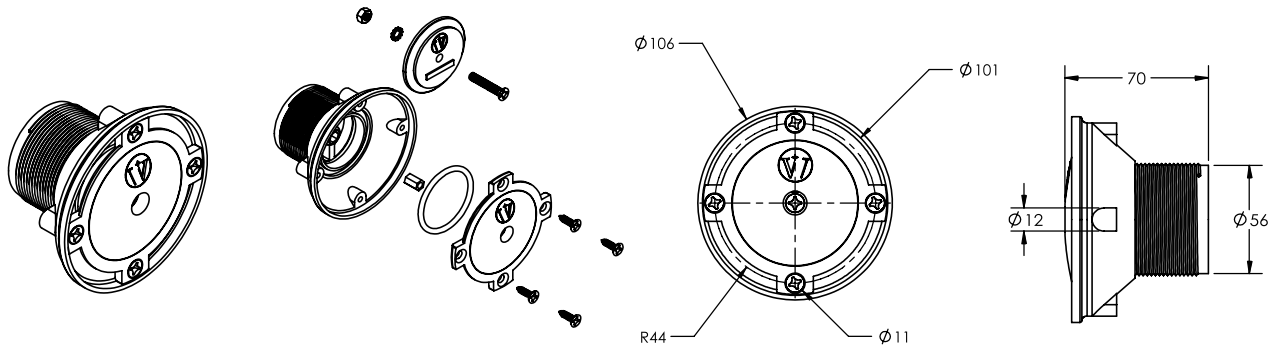

HYDRO STORM WALL INLET

PRODUCT FEATURES

- Adjustable different flows
- Supplied with stainless steel screws
- Outside diameter 50mm (glue)
- Connection inside fitting is 50mm or 2 inches pipe
- Max flow rate 5 m³/h

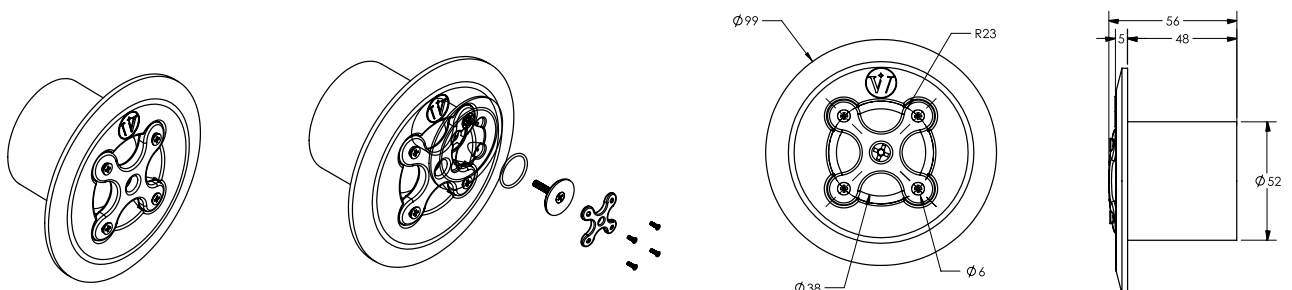





CONCRETE POOL FITTINGS

STANDARD VACUUM POINT



PRODUCT FEATURES





- Made of plastic resistant to pool chemicals and UV rays
- Used for pool periodic maintenance and cleaning
- Cover is to be removed to connect vacuum hose
- Outside diameter 2" (thread)
- Inside diameter 50 mm (glue)
- Custom colors available upon request

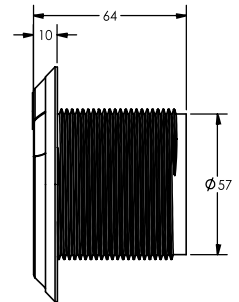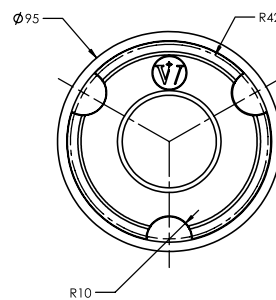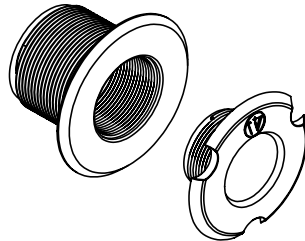

HYDRO STORM VACUUM POINT

PRODUCT FEATURES

- Made of plastic resistant to pool chemicals and UV rays
- Used for pool periodic maintenance and cleaning
- Cover is to be removed to connect vacuum hose
- Outside diameter 50 mm (glue)
- Connection inside fitting is 50 mm or 2 inch pipe

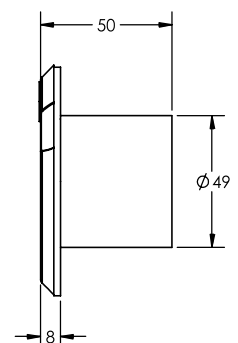
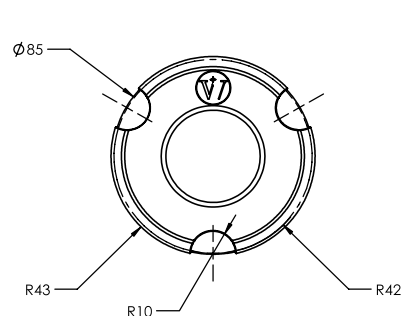
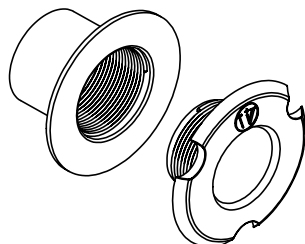



MAIN DRAIN

PRODUCT FEATURES






- Made of white ABS plastic material with UV protection
- Designed for concrete and liner pools
- Designed in round shapes
- The grill diameter in 250mm
- Lateral outlets 2 inches
- Supplied with stainless steel screws, 2 gaskets and flanges (for liner pools)
- Used to draw the base water for filtering and emptying pool
- Max flow rate 15 m3/h

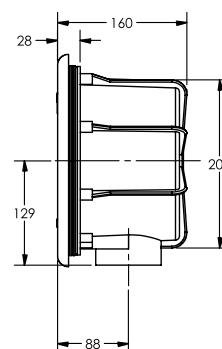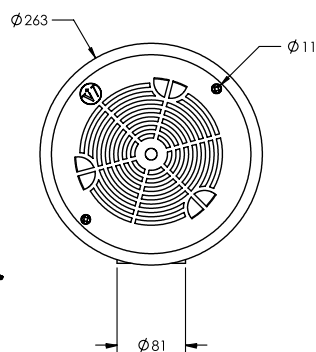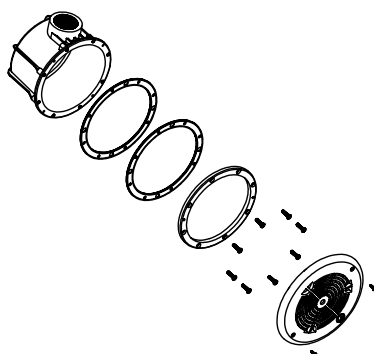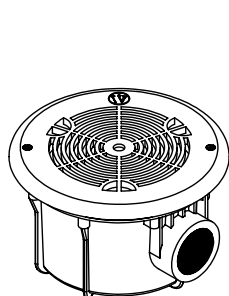

GUTTER DRAIN


PRODUCT FEATURES

- Designed specially for overflow canals
- Used as a suction element for concrete spas
- Supplied with stainless steel screws
- 63 mm inside diameter glue
- Max flow rate 10 m3/h

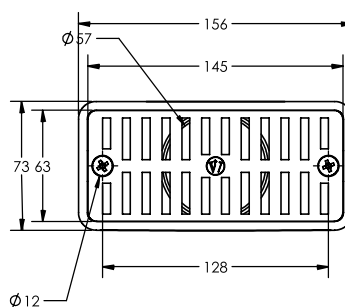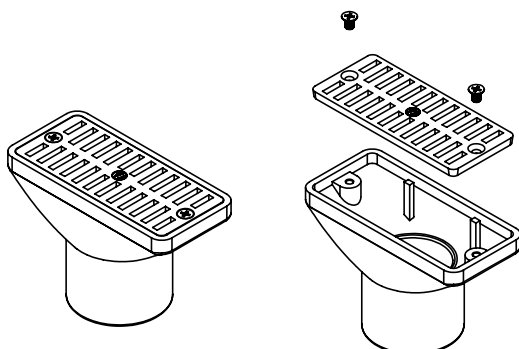



FRAME AND GRATE

9X9 INCH

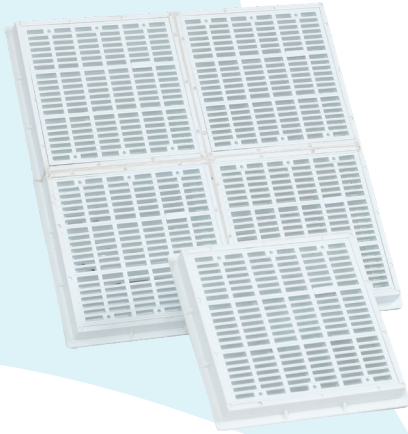

PRODUCT FEATURES

- Supplied with stainless steel screws for fixing the grill
- Max flow rate for 9"x9" 220 gal/m (50m3/h)

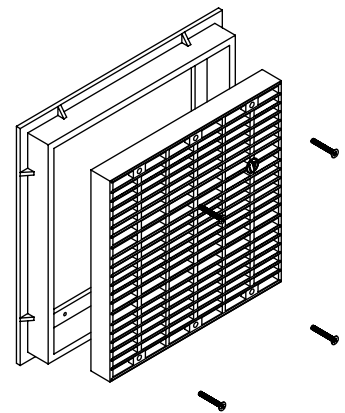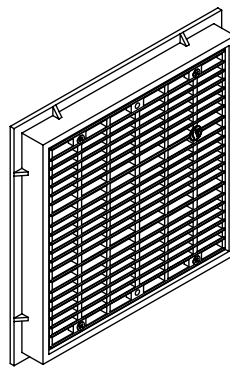


FRAME AND GRATE

18X18 INCH

PRODUCT FEATURES

- Available in 2 sizes 9"x9" and 18"x18"
- Supplied with stainless steel screws for fixing the grill
- Max flow rate for 18"x18" 924 gal/m (210 m3/h)

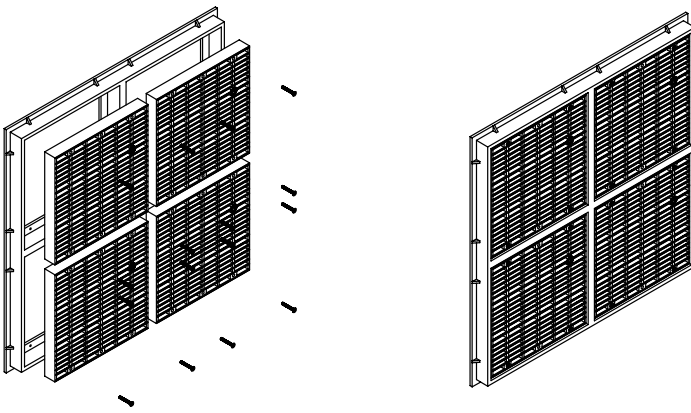



Contact Us

SALES@WATERSTAR.COM.EG
+20228605433

PLOT 15, FIFTH DISTRICT, BADR CITY